

FACT SHEET

RTF-X TIG 19pol foot-operated remote control



Product description

- Foot-operated remote control with pre-fitted connection cable
- Infinitely adjustable welding current (0% to 100%) depending on the main current preselected on the welding machine
- Operating point adjustment directly at the welding site

Compatible with every EWM TIG, MMA and plasma welding machine with a 19-pole remote control connection socket. For more information, also see the 'Compatibility' table on page 2!

Sturdier, more secure design

1 Stainless steel clip

- Easily adjust the position of the remote control with your foot
- One-sided opening allows easy yet secure positioning of the foot on the tread surface
- Tool-free assembly on both sides of the remote control

2 Tread surface

- The large tread surface ensures safe and comfortable operation (L= 312 mm W¹=117 mm W²=142 mm)
- The slip-proof coating prevents slipping, even with wet or dirty soles
- A raised edge at the heel prevents accidental slipping from the tread surface and can also be used to pull the remote control back
- Suitable for any shoe size

3 Rubber feet



- Secure positioning on any surface
- Prevent accidental movement of the remote control
- Can be quickly replaced when worn down with no need to open the casing

4 Anti-kink device

- The high-quality connection cable is fed into the remote control through a robust anti-kink device. This ensures protection from damage, even under tough conditions.

5 Hook

- Large, sturdy hook for transport on EWM machines and Trolley transport systems or standard transport carts.

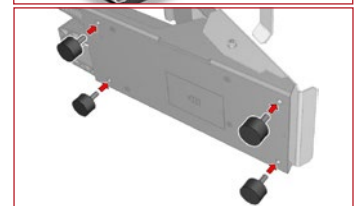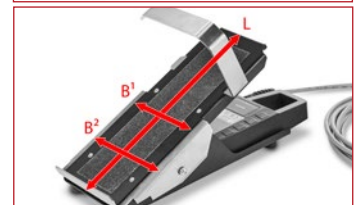

FACT SHEET

RTF-X TIG 19pol foot-operated remote control



Compatibility


Pico	Picotig	Tetrix	Tetrix XQ	Microplasma
180	200	200	230	25-2
220	220	230	300	55-2
300		300	350	105-2
350		351	400	
400		451	500	
		551	600	

Technical data

Cable length	5 m
Connection	19-pole
Dimensions (L x W x H)	377 mm x 154 mm x 228 mm 14.8 inches x 6.1 inches x 8.9 inches
Weight	2.9 kg 6.39 lbs
Product certification	CE UK ENEC

Accessories

Extension cable, 19-pole

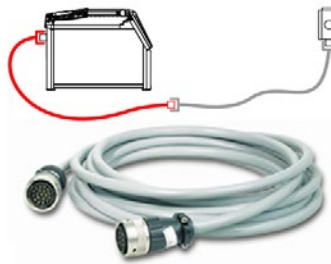

Item numbers

Designation	Cable length	PU	Item number	PG
RTF-X TIG 19pol 5 m	5 m	1	090-008855-00005	M1
	5 m	1	092-000857-00000	M12
	10 m	1	092-000857-00010	M12
	15 m	1	092-000857-00015	M12
	20 m	1	092-000857-00020	M12
Extension cable, 19-pole				